

FORM PTO-1390
(REV. 12-2001)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

3610-20

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

U.S. APPLICATION NO. (If known, see 37 CFR 1.5

not **10/049462**

INTERNATIONAL APPLICATION NO.

PCT/EP00/07675

INTERNATIONAL FILING DATE

03/AUGUST/2000

PRIORITY DATE CLAIMED

13/AUGUST/1999

TITLE OF INVENTION

COATING COMPOSITIONS AND TEXTILE FABRICS COATED THEREWITH

APPLICANT(S) FOR DO/EO/US

Stephen JAMES/David LAWSON/Melanie VAN DER VEEN

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☐ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11 to 20 below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
14. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
15. ☒ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information: Certificate of Express Mail; Return postcard.
Copies of: RO/101; Published Appln. No. WO 01/12894A1
International Search Report; ISA210

<p>10/049462</p> <p>U.S. APPLICATION NO. (37 CFR 1.101) NOT YET KNOWN</p>		<p>INTERNATIONAL APPLICATION NO PCT/EP00/07675</p>		<p>ATTORNEY'S DOCKET NUMBER 3610-20</p>	
--	--	--	--	---	--

<p>21. <input checked="" type="checkbox"/> The following fees are submitted:</p> <p>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</p> <p>Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1040.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00</p> <p>International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00</p> <p>International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00</p> <p style="text-align: right;">ENTER APPROPRIATE BASIC FEE AMOUNT =</p>				<p>CALCULATIONS PTO USE ONLY</p> 	
				\$ 890.00	
<p>Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).</p>				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	15 - 20 =	0	x \$18.00	\$	
Independent claims	2 - 3 =	0	x \$84.00	\$	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$280.00	
TOTAL OF ABOVE CALCULATIONS =				\$ 890.00	
<p><input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.</p>				\$	
SUBTOTAL =				\$ 890.00	
<p>Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</p>				\$	
TOTAL NATIONAL FEE =				\$	
<p>Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +</p>				\$ 40.00	
TOTAL FEES ENCLOSED =				\$ 930.00	
				Amount to be refunded: \$	
				charged: \$	

a. ☒ A check in the amount of \$ 930.00 to cover the above fees is enclosed.


b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. 04-1679. A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card
information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO: LEWIS F. GOULD, JR.
DUANE MORRIS LLP
ONE LIBERTY PLACE
PHILADELPHIA, PA 19103


 SIGNATURE
 LEWIS F. GOULD, JR.

NAME
 25,057

REGISTRATION NUMBER

DOCKET NO. 3610-20

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: **Stephan James, David Lawson, Melanie Van Der Veen**

U.S. Serial No.: **NOT YET KNOWN**

Int'l Application No.: **PCT/EP00/07675**

Int'l Filing Date: **3/AUGUST/2000**

U.S. Filing Date: **HEREWITH**

For: **COATING COMPOSITIONS AND TEXTILE FABRICS COATED THEREWITH**

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231
ATTN: BOX PCT

Sir:

Prior to examination, please amend the above-identified patent application, as follows:


IN THE CLAIMS

Please enter the following complete set of claims. A marked-up version of the claims showing changes made appears after the Remarks.

1 (amended). A coating composition for textile fabrics, which is curable to an elastomeric finish, which composition comprises (a) a first organopolysiloxane material having only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of from 50 to 650 mm²/s; (b) a second organopolysiloxane material having only silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of at least 10,000 mm²/s; (c) a third organopolysiloxane material having aliphatically unsaturated hydrocarbon

substituents at terminal siloxane units and on units in the polymer chain per molecule;
 (d) an organosilicon crosslinker having at least 3 silicon-bonded hydrogen atoms, (e)
 a catalyst able to promote the reaction of the aliphatically unsaturated hydrocarbon or
 hydrocarbonoxy substituents with Si-H groups and (f) a reinforcing filler.

2 (amended). A coating composition according to Claim 1, wherein the first
 and second organosiloxane polymers are of a generally linear nature having the general
 structure (II)

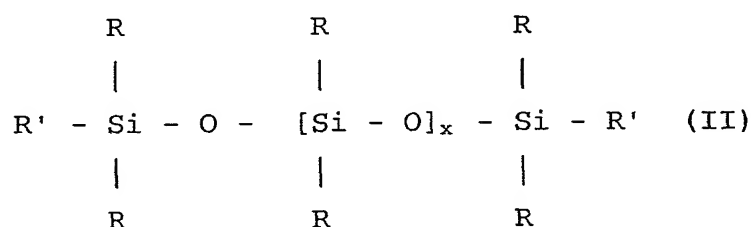


wherein R is a monovalent hydrocarbon group having up to 18 carbon atoms and R' is
 a monovalent hydrocarbon or hydrocarbonoxy group having aliphatic unsaturation and
 wherein x is an integer with a value of up to 200 for the first organopolysiloxane (a) and
 having a value of at least 300 for the second organopolysiloxane (b).

3 (amended). A coating composition according to Claim 2, wherein the first
 organopolysiloxane is an α,ω -vinyl dimethylsiloxypolydimethylsiloxane polymer having
 a viscosity of from 50 to 650 mm²/s at 25°C, and wherein the second
 organopolysiloxane is an α,ω -vinyl dimethylsiloxypolydimethylsiloxane polymer having
 a viscosity of from 10,000 to 90,000 mm²/s at 25°C.

4 (amended). A coating composition according to Claim 1, wherein the third organosiloxane polymer is of a generally linear nature having the general structure


(III)

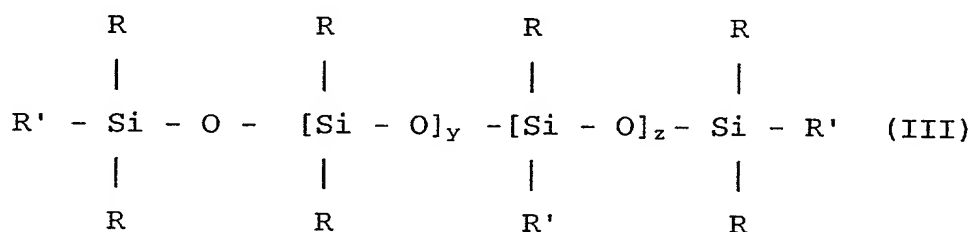

wherein R and R' have the same meaning as above, and wherein y is zero or an integer and z has a value of at least 1, while the value of y+z is no more than 300.

5 (amended). A coating composition according to Claim 1, wherein the first and second organopolysiloxane are present in a weight ratio of (a) to (b) of from 1 to 2 to 1 to 20 and the second and third organopolysiloxanes are present in a weight ratio of (b) to (c) of from 20 to 1 to 2 to 1.

6 (amended). A coating composition according to Claim 1, wherein the organosilicon cross-linker has the general formula



wherein R⁴ denotes an alkyl or aryl group having up to 10 carbon atoms, R³ is a group R⁴ or a hydrogen atom, p has a value of from 0 to 20, q has a value of from 1 to 70, and there are at least 3 silicon-bonded hydrogen atoms present per molecule.

7 (amended). A coating composition according to Claim 1, wherein the catalyst is based on a Group VIII metal selected from ruthenium, rhodium, palladium, osmium, iridium and platinum.

8. A coating composition according to Claim 7, wherein the catalyst is selected from chloroplatinic acid, platinum acetylacetonate and complexes of platinous halides with unsaturated compounds.

9 (amended). A coating composition according to Claim 1, wherein the reinforcing filler is selected from silica, titania and glass microspheres.

10 (amended). A coating composition according to Claim 1, comprising (a) 100 parts by weight of a first organopolysiloxane material having only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of from 50 to 650 mm²/s; (b) from 300 to 700 parts by weight of a second organopolysiloxane material having only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of at least 10,000 mm²/s; (c) from 50 to 150 parts by weight of a third organopolysiloxane material having aliphatically unsaturated hydrocarbon substituents at terminal siloxane units and on units in the polymer chain per molecule; (d) an organosilicon compound having at least three silicon-bonded hydrogen atoms per molecule, in an amount which is sufficient to give a molar ratio of Si-H groups in (d) to alkenyl groups in (a), (b) and (c) combined of from 5/1 to 10/1; (e) a group VIII based catalyst component in sufficient amounts to

catalyse the addition reaction between (a), (b) and (c) on the one hand and (d) on the other; (e) from 100 to 400 parts by weight of a hydrophobic filler.

11 (amended). A coated fabric comprising a textile fabric coated with an elastomer-forming composition according to Claim 1 cured to an elastomeric layer.

12. A coated fabric according to Claim 11 wherein the elastomeric layer has an elongation of above 400% and a tear strength of over 30 kN/m.

13 (amended). A process for making a coated fabric, which comprises coating a textile fabric with a layer of an elastomer-forming coating composition according to Claim 1 and causing the layer to cure to form an elastomeric coating on the fabric.

14. A process according to Claim 13, wherein the composition is applied to a coat-weight prior to curing of at least 25 g/m².

15 (amended). A process according to Claim 13, wherein the composition is cured at a temperature of from 120 to 200°C for a period of up to 5 minutes.

REMARKS

This Preliminary Amendment is made to place the subject application in better form for examination in the U.S. Patent and Trademark Office. No new matter has been added. A copy of the published application, identified as International Publication No. WO 01/12894 is attached hereto.

In order to avoid placing a burden on the examining authority, applicants submit herewith a substitute specification, which includes numbering the paragraphs of the specification. In accordance with 37 C.F.R. §1.125(b)(2), no marked-up substitute specification is provided.

Please enter the Preliminary Amendment prior to examination and before calculating filing fees. A clean copy of the claims as amended is provided for the convenience of the examiner.

Respectfully submitted,

Date: 2/13/02

Richard A. Paikoff
Richard A. Paikoff
Registration No. 34,892
DUANE MORRIS LLP
One Liberty Place
Philadelphia, PA 19103
(215) 979-1853


Docket No: 3610-20 (D5228-00020)

PH1\918962.1

VERSION WITH MARKINGS TO SHOW CHANGES MADE

1 (amended). A coating composition for textile fabrics, which is curable to an elastomeric finish, which composition comprises (a) a first[, second and third] organopolysiloxane material having only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and [or hydrocarbonoxy substituents,] a viscosity at 25°C of from 50 to 650 mm²/s; (b) a second organopolysiloxane material having only silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of at least 10,000 mm²/s; (c) a third organopolysiloxane material having aliphatically unsaturated hydrocarbon substituents at terminal siloxane units and on units in the polymer chain per molecule; (d) an organosilicon crosslinker having at least 3 silicon-bonded hydrogen atoms, (e) a catalyst able to promote the reaction of the aliphatically unsaturated hydrocarbon or hydrocarbonoxy substituents with Si-H groups and (f) a reinforcing filler], wherein the first and second organopolysiloxanes have aliphatically unsaturated hydrocarbon or hydrocarbonoxy substituents only at the terminal siloxane units, the first organopolysiloxane having a viscosity at 25°C of from 50 to 650 mm²/s, the second organopolysiloxane having a viscosity at 25°C of at least 10,000 mm²/s and wherein the third organopolysiloxane has aliphatically unsaturated hydrocarbon or hydrocarbonoxy substituents at terminal siloxane units and on siloxane units in the siloxane polymer chain].


2 (amended). A coating composition according to Claim 1 [or 2], wherein the first and second organosiloxane polymers are of a generally linear nature having the general structure (II)

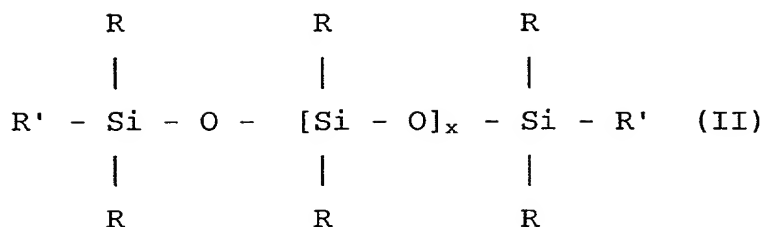

wherein R is a monovalent hydrocarbon group having up to 18 carbon atoms and R' is a monovalent hydrocarbon or hydrocarbonoxy group having aliphatic unsaturation and wherein x is an integer with a value of up to 200 for the first organopolysiloxane (a) and having a value of at least 300 for the second organopolysiloxane (b).

3 (amended). A coating composition according to [Claim 1 or] Claim 2, wherein the first organopolysiloxane is an α,ω -vinyl dimethylsiloxypolydimethylsiloxane polymer having a viscosity of from 50 to 650 mm²/s at 25°C, and wherein the second organopolysiloxane is an α,ω -vinyl dimethylsiloxypolydimethylsiloxane polymer having a viscosity of from 10,000 to 90,000 mm²/s at 25°C.


4 (amended). A coating composition according to Claim [any of Claims] 1, [to 3], wherein the third organosiloxane polymer is of a generally linear nature having the general structure (III)

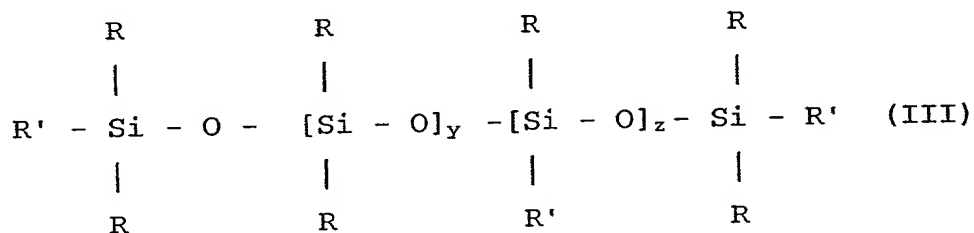

wherein R and R' have the same meaning as above, and wherein y is zero or an integer and z has a value of at least 1, while the value of y+z is no more than 300.

5 (amended). A coating composition according to Claim [any of Claims] 1 [to 4], wherein the first and second organopolysiloxane are present in a weight ratio of (a) to (b) of from 1 to 2 to 1 to 20 and[,] the second and third organopolysiloxanes are present in a weight ratio of (b) to (c) of from 20 to 1 to 2 to 1.

6 (amended). A coating composition according to Claim [any of Claims] 1 [to 5], wherein the organosilicon cross-linker has the general formula



wherein R^4 denotes an alkyl or aryl group having up to 10 carbon atoms, R^3 is a group R^4 or a hydrogen atom, p has a value of from 0 to 20, q has a value of from 1 to 70, and there are at least 3 silicon-bonded hydrogen atoms present per molecule.

7 (amended). A coating composition according to Claim [any of Claims] 1 [to 6], wherein the [which further comprises a] catalyst is based on a Group VIII metal selected from ruthenium, rhodium, palladium, osmium, iridium and platinum.

9 (amended). A coating composition according to Claim [any of Claims] 1 [to 8], wherein the reinforcing filler is selected from silica, titania and glass microspheres.

10 (amended). A coating composition according to Claim [any of Claims] 1 [to 9], comprising (a) 100 parts by weight of a first organopolysiloxane material having

only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of from 50 to 650 mm²/s; (b) from 300 to 700 parts by weight of a second organopolysiloxane material having only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of at least 10,000 mm²/s; (c) from 50 to 150 parts by weight of a third organopolysiloxane material having [has] aliphatically unsaturated hydrocarbon substituents at terminal siloxane units and on units in the polymer chain per molecule; (d) an organosilicon compound having at least three silicon-bonded hydrogen atoms per molecule, in an amount which is sufficient to give a molar ratio of Si-H groups in (d) to alkenyl groups in (a), (b) and (c) combined of from 5/1 to 10/1; (e) a group VIII based catalyst component in sufficient amounts to catalyse the addition reaction between (a), (b) and (c) on the one hand and (d) on the other; (e) from 100 to 400 parts by weight of a hydrophobic filler.

11 (amended). A coated fabric comprising a textile fabric coated with an elastomer-forming composition according to Claim 1 [any of the preceding claims] cured to an elastomeric layer.

13 (amended). A process for making a coated fabric, which comprises coating a textile fabric with a layer of an elastomer-forming coating composition according to Claim [any of Claims] 1 [to 10] and causing the layer to cure to form an elastomeric coating on the fabric.

15 (amended). A process according to Claim 13 [or Claim 14], wherein the composition is cured at a temperature of from 120 to 200°C for a period of up to 5 minutes.

- 1 -

COATING COMPOSITIONS AND TEXTILE FABRICS COATED THEREWITH

[0001] The present invention relates to a coating composition for textile fabrics and to textile fabrics coated with such compositions, and in particular to a fabric coated with a silicone-based coating composition capable of maintaining a pressure barrier between two areas with a pressure differential. The invention also relates to a process of preparing such textile fabrics and to airbags made with coated fabrics.

[0002] Coating compositions for textile substrates, which provide a flexible coat on the fabric, e.g. to decrease permeability of the fabric or to improve thermal protection of the fabric are well known in the art, and are described in many patent specifications, such as those referred to below. The present invention is particularly concerned with coating compositions which give a silicone-based elastomeric finish. It is traditionally required to use an adhesion promoter in such compositions to ensure good adhesion to the fabric and to maintain a good shelf life of the coated textile fabric.

[0003] EP 553840 describes a liquid silicone rubber coating composition for application to airbags in automobiles, which comprises a polydiorganosiloxane having alkenyl groups, an polyorganosiloxane resin, an inorganic filler, a certain polyorganohydrosiloxane, a platinum group metal catalyst and an epoxy group-containing organosilicon compound. EP 646672 describes a fabric for airbags impregnated with a silicone composition comprising a linear polyorganosiloxane having aliphatic unsaturation, a certain polyorganohydrosiloxane, a catalyst promoting addition reaction, a hydrophobic silica, a flame retardant and optionally an adhesion promoting agent.

[0004] While fabrics coated with such compositions may be satisfactory for airbag applications, they do not satisfy requirements where pressurised fluids are to be retained in a fabric envelope for a relatively long period. This

5 requirement exists for example in the application of such coatings to side curtain airbags for the automotive industry. These side curtain airbags are intended to inflate at the time of impact, as do conventional airbags.

The side curtains unfold to form a cushioned curtain between

10 passengers and some of the side of the car body, e.g., the windows. As the intention is not merely to cushion the blow on impact itself, as is the case for conventional driver and passenger airbags, but e.g. to protect passengers when a car is rolling, it is important that the side curtain air bag is

15 sufficiently pressurised during such rolling process. Where conventional driver and passenger airbags only need to

retain pressure for a fraction of a second, it is desirable that side curtain airbags maintain a suitable pressure for a few seconds. Similar applications exist where a pressurised

20 fabric structure is desired to maintain a certain fluid pressure for a relatively extended period of time, e.g. in emergency chutes for aeroplanes, inflatable rafts etc.

[0005] EP 886164 describes a coated fabric comprising a textile fabric coated with at least two layers of an

25 polyorganosiloxane-based elastomeric material, characterised in that the first layer is coated onto the fabric and has an elongation-at-break of at least 400% and in that the second layer has a tear-strength of at least 30kN/m. However the application of 2 coats onto a fabric substrate causes

30 additional work and cost to the manufacturing process and may provide a final coating of fairly high coat weight.

There is a need to provide coatings which will perform well in the side curtain applications, but which require only a

single coat and still provide good performance, preferably at lower coat weight.

[0006] According to a first aspect of the invention, there is provided a coating composition for textile fabrics, which is curable to an elastomeric finish, which comprises a first, second and third organopolysiloxane having aliphatically unsaturated hydrocarbon or hydrocarbonoxy substituents, an organosilicon crosslinker having at least 3 silicon-bonded hydrogen atoms, a catalyst able to promote the reaction of the aliphacally unsaturated hydrocarbon or hydrocarbonoxy substituents with Si-H groups and a reinforcing filler, wherein the first and second organopolysiloxanes have aliphatically unsaturated hydrocarbon or hydrocarbonoxy substituents only at the terminal siloxane units, the first organopolysiloxane having a viscosity at 25°C of from 50 to 650 mm²/s, the second organopolysiloxane having a viscosity at 25°C of at least 10,000 mm²/s and wherein the third organopolysiloxane has aliphatically unsaturated hydrocarbon or hydrocarbonoxy substituents at terminal siloxane units and on siloxane units in the siloxane polymer chain.


[0007] We have found surprisingly that such coating compositions do not need any adhesion promoters to ensure good adhesion to textile fabrics. We have also found that fabrics coated according to the present invention are beneficial in standard airbags and other inflatable safety restraint devices.

[0008] The coating composition comprises organopolysiloxanes which are able to cure to an elastomeric finish via an addition reaction. Useful organopolysiloxanes comprise units of the general formula $R_aR'_bSiO_{4-a-b/2}$ (I), wherein R is a monovalent hydrocarbon group having up to 18 carbon atoms, R' is a monovalent hydrocarbon or hydrocarbonoxy group having aliphatic unsaturation, a and b

have a value of from 0 to 3, the sum of a+b being no more than 3, provided the conditions outlined above for the organopolysiloxane materials are complied with.

[0009] Preferably the first and second organosiloxane

5 polymers are of a generally linear nature having the general structure (II)

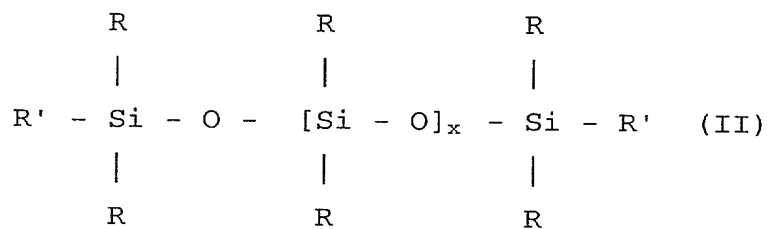


wherein R and R' have the same meaning as above, and wherein x is an integer to allow the organopolysiloxane to fulfill the requirements for the viscosity range, mentioned above, 15 for example a value of up to 300, preferably from 75 to 250, more preferably 100 to 200 for the first organopolysiloxane and having a value of at least 300, preferably from 400 to 1000, more preferably 450 to 1000 for the second organopolysiloxane. It is particularly preferred that R 20 denotes an alkyl or aryl group having from 1 to 8 carbon atoms, e.g. methyl, ethyl, propyl, isobutyl, hexyl, phenyl or octyl. More preferably at least 50% of all R groups are methyl groups, most preferably substantially all R groups are methyl groups. R' is an aliphatically unsaturated 25 hydrocarbon or hydrocarbonoxy group, preferably a hydrocarbon group having from 2 to 22 carbon atoms, more preferably 2 to 8 carbon atoms, most preferably 2 or 6 carbon atoms. It is particularly preferred that the aliphatically unsaturated group is an alkenyl group, 30 although alkynyl groups may also be used. Particularly useful are vinyl, allyl and hexenyl groups, most preferably having terminal unsaturation. It is most preferred that first organopolysiloxane is an α,ω -vinyl dimethylsiloxyl

polydimethylsiloxane polymer having a viscosity of from 50 to 650 mm²/s at 25°C, more preferably 100 to 600 mm²/s, most preferably 300 to 600 mm²/s. It is also most preferred that second organopolysiloxane is an α,ω -vinyl dimethylsiloxo

5 polydimethylsiloxane polymer having a viscosity of from 10,000 to 90,000 mm²/s at 25°C, more preferably 20,000 to 80,000 mm²/s, most preferably 40,000 to 70,000 mm²/s.

[0010] Preferably the third organosiloxane polymer is also of a generally linear nature having the general

10 structure (III)

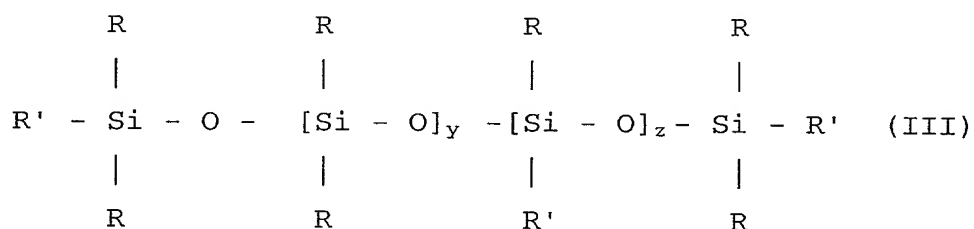

wherein R and R' have the same meaning as above, and wherein y is zero or an integer and z has a value of at least 1.

The value of y+z is no more than 300, preferably from 100 to 200, more preferably from 120 to 180. The value of z is

20 preferably at least 2, more preferably from 2 to 20, most preferably 2 to 5. It is most preferred that third

organopolysiloxane is an α,ω -vinyl dimethylsiloxo

polydimethylsiloxane polymethylvinylsiloxo co-polymer having

25 a viscosity of from 50 to 650 mm²/s at 25°C, more preferably 100 to 600 mm²/s, most preferably 300 to 600 mm²/s.


[0011] The relative amounts of first second and third organopolysiloxanes of the first aspect of the invention are not crucial, although it is preferred that the second organopolysiloxane is present in the largest amount. A

30 factor which will influence the exact ratios is the viscosity of each of the organopolysiloxanes and the desired viscosity of the composition needed for coating the textile fabrics. It is preferred that this viscosity is

sufficiently low to allow the use of standard coating equipment at normal temperatures. Suitable weight ratios of the first to second organopolysiloxanes are from 1 to 2 to 1 to 20, whilst suitable weight ratios of the second to third organopolysiloxanes are from 20 to 1 to 2 to 1.



Particularly suitable weight ratio of first, second and third organopolysiloxanes are 1/2/1, 1/5/1, 2/10/1, 1/10/2, 5/10/1 and 2/5/1. It is preferred that first, second and third organopolysiloxanes combined comprise from 40 to 95% by weight of the elastomer-forming coating composition according to the first aspect of the invention, preferably from 50 to 85%, more preferably 60 to 80%.

[0012] Organosilicon cross-linkers for use in the elastomer-forming coating composition according to the invention are preferably selected from silanes, low molecular weight organosilicon resins and short chain organosiloxane polymers. The cross-linker compound has at least 3 silicon-bonded hydrogens which are capable of reacting with the silicon-bonded groups R' of the organopolysiloxane described above by addition reaction between the cross-linking organosilicon compound and the organopolysiloxane, for example according to the general reaction scheme (IV), wherein R" is a divalent hydrocarbon group and y is as defined above, preferably here with a value of 1.



[0013] A suitable silane which may serve as cross-linking organosilicon compound is methyltrihydrosilane. Suitable organosilicon resin compounds include organosilicon resins consisting mainly of tetrafunctional siloxane units of the formula $\text{SiO}_{4/2}$ and monofunctional units $\text{R}_v\text{H}_w\text{Si}_{1/2}$, wherein R is as defined above, y and w each have a value of from 0 to 3, the sum of v+w being 3. Suitable short chain

organosiloxane polymers include those having at least 3 silicon-bonded hydrogen atoms per molecule and may be linear or cyclic. Preferred organosilicon cross-linkers have the general formula



wherein R^4 denotes an alkyl or aryl group having up to 10 carbon atoms, R^3 is a group R^4 or a hydrogen atom, p has a value of from 0 to 20, q has a value of from 1 to 70, and there are at least 3 silicon-bonded hydrogen atoms present per molecule. It is not crucial but preferred that the silicon-bonded hydrogen atoms are on terminal silicon atoms for linear siloxane compounds. It is preferred that R^4 denotes a lower alkyl group having no more than 3 carbon atoms, most preferably a methyl group. R^3 preferably denotes an R^4 group. Preferably $p = 0$ and q has a value of from 2 to 70, more preferably 2 to 30, or where cyclic organosilicon materials are used, from 3 to 8. It is most preferred that the organosilicon crosslinker is a siloxane polymer having a viscosity of from 1 to 150 mm²/s at 25°C, more preferably 2 to 100 mm²/s, most preferably 5 to 60 mm²/s. The cross-linking organosilicon compound may comprise a mixture of several materials as described.

[0014] Examples of suitable organosilicon cross-linkers are trimethylsiloxane end-blocked polymethylhydrosiloxane having up to for example 20 carbon atoms, dimethylhydrosiloxane end-blocked methylhydro siloxane, dimethylsiloxane methylhydrosiloxane copolymer and tetramethylcyclotetrasiloxane. The size of the organosilicon crosslinker is not crucial, but preferred are short chain organosiloxane polymers having at least three silicon-bonded hydrogen atoms, which have a chain length of

from 2 to 50 silicon atoms, more preferably from 5 to 20. The amount of crosslinker used is preferred to allow a ratio of number of silicon-bonded hydrogen atoms to aliphatically unsaturated hydrocarbon and hydrocarbonoxy groups in the elastomer-forming composition, which is at least 5/1, preferably from 5/1 to 10/1, most preferably 6/1 to 8/1.

[0015] In addition to the organopolysiloxanes and the organosilicon cross-linking compounds, the elastomer-forming compositions according to the invention preferably also

comprise a suitable catalyst, selected from those based on precious metals, particularly Group VIII metals, including ruthenium, rhodium, palladium, osmium, iridium and platinum. Preferably the catalyst is a well-known platinum compound or complex. Suitable platinum compounds and complexes include chloroplatinic acid, platinum acetylacetonate, complexes of platinumous halides with unsaturated compounds such as ethylene, propylene, organovinylsiloxanes, and styrene, hexamethyldiplatinum, PtCl_2 , PtCl_3 , PtCl_4 , and $\text{Pt}(\text{CN})_3$. The preferred platinum catalyst is a form of chloroplatinic acid, either as the commonly available hexa-hydrate form or in its anhydrous form, as taught in US patent 2,823,218.

Another particularly useful catalyst is the composition that is obtained when chloroplatinic acid is reacted with an aliphatically unsaturated organosilicon compound such as divinyltetramethyl-disiloxane, as disclosed in US patent 3,419,593. It is preferred that the catalyst is employed in an amount giving from 2 to 100 ppm by weight of platinum metal based on the total weight of the total composition, more preferably 5 to 50ppm.

[0016] Another essential ingredient in the elastomer-forming coating composition according to the invention is a reinforcing filler. Suitable fillers include silica, e.g. fumed silica, precipitated silica, gel-formation silica, aerosils, titania and glass microspheres. Preferably the

filler has a hydrophobic surface, which may be obtained by treating the filler, e.g. with suitable silanes, short chain siloxanes, fatty acids or resinous silicone materials.

Suitable materials and processes for rendering the surface of fillers hydrophobic have been described in the literature, and are known to the person skilled in the art. The amount of reinforcing filler is again not crucial, but preferably from 10 to 50% by weight of the total elastomer forming composition consists of the filler, more preferably from 15 to 40%, most preferably 20 to 30%.

[0017] Other additional components may be included in suitable elastomer-forming compositions, including other fillers, chain extenders, dyes, adhesion promoters, colorants, pigments, viscosity modifiers, bath-life extenders, inhibitors and flexibilisers. Suitable other fillers include ground quartz, ground cured silicone rubber particles and calcium carbonate. Preferably these fillers have been treated to make their surface hydrophobic where necessary as described above. Adhesion promoters include epoxy-functional, organotitanates or amino-functional organosilicon compounds. Chain extenders are preferably not used, but where they are used, they tend to be organosiloxane materials which are predominantly linear in nature and which have a silicon-bonded hydrogen at each end of the polymer, allowing it to react with the R' group of siloxane polymers, this merely extending the length of the siloxane polymer.

[0018] The coating composition is preferably a composition which comprises

(a) 100 parts by weight of a first organopolysiloxane material having only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of from 50 to 650 mm²/s;

(b) from 300 to 700 parts by weight of a second organopolysiloxane material having only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of at least 10,000 mm²/s;

5 (c) from 50 to 150 parts by weight of a third organopolysiloxane material having has aliphatically unsaturated hydrocarbon substituents at terminal siloxane units and on units in the polymer chain per molecule;

(d) an organosilicon compound having at least three silicon-
10 bonded hydrogen atoms per molecule, in an amount which is sufficient to give a molar ratio of Si-H groups in (d) to alkenyl groups in (a), (b) and (c) combined of from 5/1 to 10/1;

(e) a group VIII based catalyst component in sufficient
15 amounts to catalyse the addition reaction between (a), (b) and (c) on the one hand and (d) on the other;

(f) from 100 to 400 parts by weight of a hydrophobic filler.

[0019] The elastomer-forming coating composition may be prepared by merely mixing the ingredients in the desired
20 ratios. However, for reasons of storage stability and bath life before or during application of the compositions to the textile fabric, it is preferred to store the composition in two parts, by separating the catalyst (d) from the organosilicon cross-linker. The other components of the
25 compositions are often distributed over both parts in proportions which will allow easy mixing of the two parts immediately prior to application. Such easy mixing ratios may be e.g. 1/10 or 1/1 ratios.

[0020] The invention includes a process for coating
30 textile fabric with a layer of an elastomer-forming coating composition according to the invention and causing the layer to cure to form an elastomeric coating on the fabric. The invention also includes a coated fabric comprising a textile

fabric coated with an elastomer-forming composition as described above cured to an elastomeric layer.

[0021] Suitable fabrics for use in the present invention may be made from synthetic fibres or blends of natural and synthetic fibres, and include polyester, polyimides, polyethylene, polypropylene, polyester-cotton, glass fibre, most preferably polyamide fibres such as Nylon 6,6. They are preferably woven fabrics. They are required to be flexible in order to be useful as inflatable bodies.

Preferably they are sufficiently flexible to be able to be folded into relatively small volumes, but also sufficiently strong to withstand their deployment at high speed, e.g. under the influence of an explosive charge, the impact of passengers or to be resistant to other influences when inflated.

[0022] The elastomer forming coating compositions may be applied according to known techniques to the textile fabric substrates. These include spraying, gravure coating, bar coating, coating by knife-over-roller, coating by knife-over-air, padding and screen-printing. It is preferred that the composition is applied by a knife-over-air or knife-over-roller coating method. It is also preferred that the composition is applied to a coat-weight prior to curing of at least 25 g/m². Preferably the coating thickness is from 25 to 150g/m², more preferably 60 to 130g/m² for applications where pressure needs to be maintained longer, e.g. in side curtain airbags, or 30 to 50 g/m² for applications where the pressure retention is not so critical over prolonged periods, e.g. in standard driver airbags. In order to make the compositions easily applicable to the textile fabric, it is preferred that the viscosity of the composition is from 50,000 to 200,000 mm²/s. The textile fabric is preferably scoured prior to application, in order to ensure good adhesion of the composition.

[0023] Although it is not preferred, it is possible to apply the composition in multiple layers, which together fulfill the preferred criteria set out above. It is also possible to apply onto the coating composition a further coating, e.g. of a material providing low friction, or an additional textile fabric, whether woven or non-woven, to improve the strength and/or the feel of the fabric.

[0024] Curing conditions for the coating are preferably at elevated temperatures over a period which will vary depending on the actual temperature used, for example 120 to 200°C for a period of up to 5 minutes.

[0025] The advantage of the invention is that without having to combine multiple layers of coating on the surface of a textile fabric the fabric is still very able to form a barrier between areas of differing pressure. Particularly useful applications for textile fabrics coated according to the present invention are those applications where the fabric is formed into an envelope and pressure is applied inside the envelope, e.g. by introducing gas into the envelope and thus inflating it. Particularly useful applications include automotive airbags, emergency shoots on aeroplanes, hot air balloons. The most valuable use of fabrics according to the invention is in the production of side curtain airbags for automobiles, where the internal pressure of the envelope needs to be maintained for a relatively long period of time, e.g. from 1 to 5 seconds. A specific advantage of the invention is that the cured coating provides the combination of very high values of elongation at break and tear strength values, making the composition particularly suitable for use with inflatable devices. It was found that the elongation at break is on average at least 400% and tear strength at least 30kN/m.

[0026] The following examples, where parts and percentages are given in weight, unless otherwise stated and where viscosity is dynamic viscosity at 25°C, illustrate the invention.

5

Examples

[0027] A first composition (I) was prepared by mixing together 52 parts of an α,ω -vinyl dimethylsiloxane end-
10 blocked polydimethylsiloxane having a viscosity of about 55,000mm²/s, 16 parts of an α,ω -vinyl dimethylsiloxane end-blocked polydimethylsiloxane having a viscosity of about 450mm²/s, 7 parts of an vinyl dimethylsiloxane end-blocked polydimethyl, polymethylvinyl siloxane copolymer having a
15 viscosity of about 350mm²/s, 25 parts of a fumed silica which had its surface made hydrophobic and 0.002 parts by weight of a platinum based catalyst. Composition (I) had a viscosity of 130,000mm²/s.

[0028] A second composition (II) was prepared, containing
20 51 parts by weight of an α,ω -vinyl dimethylsiloxane end-blocked polydimethylsiloxane having a viscosity of 55,000mm²/s, 3 parts of an α,ω -vinyl dimethylsiloxane end-blocked polydimethylsiloxane having a viscosity of about 450mm²/s, 9 parts of an vinyl dimethylsiloxane end-blocked
25 polydimethyl, polymethylvinyl siloxane copolymer having a viscosity of about 350mm²/s, 25 parts by weight of a fumed silica which had its surface made hydrophobic, 12 parts by weight of an methylhydrosiloxane dimethylsiloxane copolymer having trimethylsiloxane end-blocking units, at least 3
30 silicon-bonded hydrogen atoms per molecule and a viscosity of about 5mm²/s. Composition (II) had a viscosity of 130,000mm²/s.

[0029] A first comparative elastomer-forming composition (C1) was prepared by mixing together 70 parts of an α,ω -vinyl dimethylsiloxane end-blocked polydimethylsiloxane having a viscosity of about 2,000mm²/s, 30 parts of a fumed silica which had its surface made hydrophobic and 0.002 parts by weight of a platinum based catalyst. Composition (C1) had a viscosity of 100,000mm²/s.

[0030] A second comparative composition (C2) was prepared, containing 64 parts by weight of an α,ω -vinyl dimethylsiloxane end-blocked polydimethylsiloxane having a viscosity of 2,000mm²/s, 26 parts by weight of a fumed silica which had its surface made hydrophobic, 4 parts by weight of an methylhydrosiloxane dimethylsiloxane copolymer having trimethylsiloxane end-blocking units, at least 3 silicon-bonded hydrogen atoms per molecule and a viscosity of about 5mm²/s and 5 parts by weight of a dimethylsiloxane having dimethylhydrosiloxane end-blocking units and a viscosity of about 10 mm²/s. Composition (C2) had a viscosity of 100,000mm²/s.

[0031] A third comparative composition (C3) was prepared containing 64 parts of an α,ω -vinyl dimethylsiloxane end-blocked polydimethylsiloxane having a viscosity of about 55,000mm²/s, 25 parts of a fumed silica which had its surface made hydrophobic, 0.002 parts by weight of a platinum based catalyst, and 9 parts of a dimethylsiloxane methylvinylsiloxane copolymer having vinyl dimethylsiloxane end-blocking units and a viscosity of about 350mm²/s. Composition (C3) had a viscosity of 175,000mm²/s.

[0032] A fourth comparative composition (C4) was prepared by mixing together 61 parts of an α,ω -vinyl dimethylsiloxane end-blocked polydimethylsiloxane having a viscosity of about 55,000mm²/s, 25 parts of a fumed silica which had its surface made hydrophobic, 3 parts by weight of an

methylhydrogensiloxane dimethylsiloxane copolymer having trimethylsiloxane end-blocking units, at least 3 silicon-bonded hydrogen atoms per molecule and a viscosity of about $5\text{mm}^2/\text{s}$ and 9 parts of a dimethylsiloxane methylvinylsiloxane copolymer having vinyl dimethylsiloxane end-blocking units and a viscosity of about $350\text{mm}^2/\text{s}$. Composition (C4) had a viscosity of $175,000\text{mm}^2/\text{s}$.

[0033] A fifth comparative composition (C5) was prepared by mixing 5 parts of a first composition comprising 64 parts of a 70/30 mixture of a dimethylvinylsiloxyl-terminated polydimethylsiloxane and hydrophobic silica, 26 parts of ground quartz, 4 parts of calcium carbonate and a catalytic amount of a platinum based catalyst and 1 part of a second composition comprising 50 parts of a 70/30 mixture of a dimethylvinylsiloxyl-terminated polydimethylsiloxane and hydrophobic silica, 46 parts of a dimethylsiloxane methylhydrogen siloxane copolymer having silicon-bonded hydrogen atoms on about 50% of the silicon atoms.

Example 1

[0034] A double layered polyamide fabric of 470 Dtex was made into A4 sized envelopes coated on both sides of the fabric by a knife over roller technique with a 50/50 elastomer-forming mixture of compositions (I) and (II) to a coat weight of $120\text{g}/\text{m}^2$, followed by heating the coated fabric for 90 seconds at $150\text{--}170^\circ\text{C}$. After allowing the coated fabric to cool to room temperature, a coated fabric was obtained having a silicone-based coat.

[0035] The fabric was then inflated with air under explosive conditions to a pressure of 220 kPa. The pressure in the sealed envelope was then measured after 5 seconds and after 10 seconds. Details of the test results are given below in Table I. Also were measured tear strength and

elongation at break of a self-supported film of the cured coating composition. Results are also given in Table 1.

Comparative Examples C1-C5

5

[0036] All examples were carried out according to the process of Example 1. Comparative Example CE1 used a 50/50 mixture of Comparative compositions C1 and C2; Test results are also given in Table I below.


10

Table I

Example	Residual pressure after 5 seconds	Residual pressure after 10 seconds	Tear Strength kN/m	Elongatio n at break
1	180 kPa	150 kPa	40	600%
CE1	140 kPa	70 kPa	15	600%
CE2	130 kPa	70 kPa	45	250%
CE3	110 kPa	50 kPa	10	150%

CLAIMS

1. A coating composition for textile fabrics, which is curable to an elastomeric finish, which composition comprises (a) a first organopolysiloxane material having only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of from 50 to 650 mm²/s; (b) a second organopolysiloxane material having only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of at least 10,000 mm²/s; (c) a third organopolysiloxane material having has aliphatically unsaturated hydrocarbon substituents at terminal siloxane units and on units in the polymer chain per molecule; (d) an organosilicon crosslinker having at least 3 silicon-bonded hydrogen atoms, (e) a catalyst able to promote the reaction of the aliphatically unsaturated hydrocarbon or hydrocarbonoxy substituents with Si-H groups and (f) a reinforcing filler.
2. A coating composition according to Claim 1, wherein the first and second organosiloxane polymers are of a generally linear nature having the general structure (II)

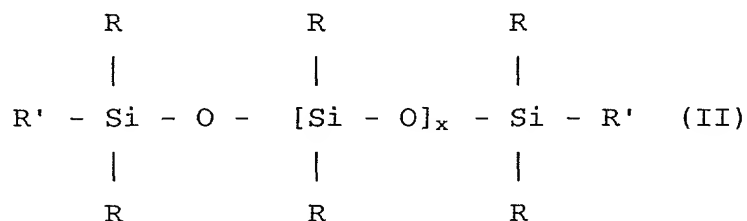


wherein R is a monovalent hydrocarbon group having up to 18 carbon atoms and R' is a monovalent hydrocarbon or hydrocarbonoxy group having aliphatic unsaturation and wherein x is an integer with a value of up to 200

for the first organopolysiloxane (a) and having a value of at least 300 for the second organopolysiloxane (b).

3. A coating composition according to Claim 2, wherein the first organopolysiloxane is an α,ω -vinyl dimethylsiloxypolydimethylsiloxane polymer having a viscosity of from 50 to 650 mm²/s at 25°C, and wherein the second organopolysiloxane is an α,ω -vinyl dimethylsiloxypolydimethylsiloxane polymer having a viscosity of from 10,000 to 90,000 mm²/s at 25°C.


4. A coating composition according to Claim 1, wherein the third organosiloxane polymer is of a generally linear nature having the general structure (III)

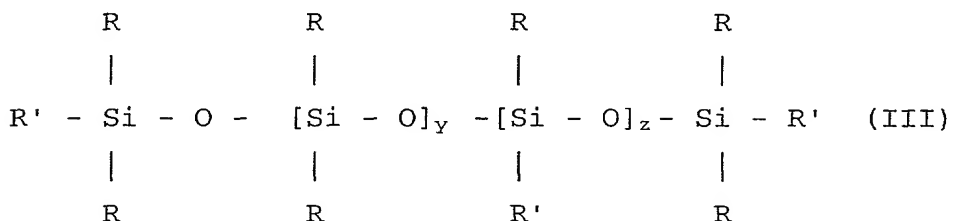


wherein R and R' have the same meaning as above, and wherein y is zero or an integer and z has a value of at least 1, while the value of y+z is no more than 300.

5. A coating composition according to Claim 1, wherein the first and second organopolysiloxane are present in a weight ratio of (a) to (b) of from 1 to 2 to 1 to 20 and the second and third organopolysiloxanes are present in a weight ratio of (b) to (c) of from 20 to 1 to 2 to 1.

6. A coating composition according to Claim 1, wherein the organosilicon cross-linker has the general formula





wherein R^4 denotes an alkyl or aryl group having up to 10 carbon atoms, R^3 is a group R^4 or a hydrogen atom, p has a value of from 0 to 20, q has a value of from 1 to 70, and there are at least 3 silicon-bonded hydrogen atoms present per molecule.

7. A coating composition according to Claim 1, wherein the catalyst is based on a Group VIII metal selected from ruthenium, rhodium, palladium, osmium, iridium and platinum.
8. A coating composition according to Claim 7, wherein the catalyst is selected from chloroplatinic acid, platinum acetylacetonate and complexes of platinous halides with unsaturated compounds.
9. A coating composition according to Claim 1, wherein the reinforcing filler is selected from silica, titania and glass microspheres.
10. A coating composition according to Claim 1, comprising
(a) 100 parts by weight of a first organopolysiloxane material having only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of from 50 to 650 mm²/s; (b) from 300 to 700 parts by weight of a second organopolysiloxane material having only terminal silicon-bonded aliphatically unsaturated hydrocarbon groups per molecule and a viscosity at 25°C of at least 10,000 mm²/s; (c) from 50 to 150 parts by weight of a third organopolysiloxane material having has aliphatically unsaturated hydrocarbon substituents at

terminal siloxane units and on units in the polymer chain per molecule; (d) an organosilicon compound having at least three silicon-bonded hydrogen atoms per molecule, in an amount which is sufficient to give a molar ratio of Si-H groups in (d) to alkenyl groups in (a), (b) and (c) combined of from 5/1 to 10/1; (e) a group VIII based catalyst component in sufficient amounts to catalyse the addition reaction between (a), (b) and (c) on the one hand and (d) on the other; (e) from 100 to 400 parts by weight of a hydrophobic filler.

11. A coated fabric comprising a textile fabric coated with an elastomer-forming composition according to Claim 1 cured to an elastomeric layer.
12. A coated fabric according to Claim 11 wherein the elastomeric layer has an elongation of above 400% and a tear strength of over 30 kN/m.
13. A process for making a coated fabric, which comprises coating a textile fabric with a layer of an elastomer-forming coating composition according to Claim 1 and causing the layer to cure to form an elastomeric coating on the fabric.
14. A process according to Claim 13, wherein the composition is applied to a coat-weight prior to curing of at least 25 g/m².
15. A process according to Claim 13, wherein the composition is cured at a temperature of from 120 to 200°C for a period of up to 5 minutes.

ABSTRACT

COATING COMPOSITIONS AND TEXTILE FABRICS COATED THEREWITH

An elastomer-forming coating composition for textile fabrics comprises a first, second and third organopolysiloxane having aliphatically unsaturated substituents, an organosilicon crosslinker having at least 3 silicon-bonded hydrogen atoms, a catalyst and a reinforcing filler. First and second organopolysiloxanes have only terminal aliphatically unsaturated substituents, first having a viscosity at 25°C of from 50 to 650 mm²/s, second a viscosity at 25°C of at least 10,000 mm²/s and third organopolysiloxane has aliphatically unsaturated substituents at terminal siloxane units and on siloxane units in the siloxane polymer chain. Coated textile fabrics and a process for making them is also claimed. Coated fabrics are especially useful in applications where they form a barrier between areas of differing pressures, e.g. airbags. Resulting coatings combine very good tear strength and elongation at break values.

2025 RELEASE UNDER E.O. 14176

**Declaration and Power of Attorney for Patent Application
English Language Declaration**

As a below named inventor, I hereby declare that:

Our residence, post office address and citizenship are as stated below next to my name,

We believe we are the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention titled:

COATING COMPOSITIONS AND TEXTILE FABRICS COATED THEREWITH

the specification of which (check one):

☐ is attached hereto.

X was filed on 03 August 2000 as PCT International Application Number PCT/EP00/07675 and was amended on _____

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Applications

Priority Not Claimed

<u>PCT/EP00/07675</u> (Number)	<u>WO</u> (Country)	<u>03 August 2000</u> (Day/Month/Year Filed)	<input type="checkbox"/>
<u>9919074.6</u> (Number)	<u>GB</u> (Country)	<u>13 August 1999</u> (Day/Month/Year Filed)	<input type="checkbox"/>
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/>

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

(Application Serial No.)

(Filing Date)

I hereby claim the benefit under 35 U.S.C. Section 120 of any United States application(s), or Section 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. Section 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C.F.R. Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

(Application Serial No.)

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Lewis F Gould	Reg No	<u>25,057</u>	William H Murray	Reg No	<u>27,218</u>
Stephen P Gribok	Reg No	<u>29,643</u>	Peter J Cronk	Reg No	<u>32,021</u>
Robert E Rosenthal	Reg No	<u>33,450</u>	Richard A Paikoff	Reg No	<u>34,892</u>
Samuel W Apicelli	Reg No	<u>36,427</u>	Steven E Koffs	Reg No	<u>37,163</u>
Stephen Kinsella	Reg No	<u>37,657</u>	Daniel S Goldberg	Reg No	<u>39,689</u>
Gail A Dalicas	Reg No	<u>40,979</u>	Darius C Gambino	Reg No	<u>41,472</u>
Anthony Colesanti	Reg No	<u>42,428</u>			


13

SEND CORRESPONDENCE TO: Lewis F Gould Jr Esq
Duane, Morris & Hecksher LLP
One Liberty Place
Philadelphia PA 19103
Telephone (215) 979-1282

Full name of sole or first inventor Stephen James	
Sole or first inventor's signature <i>S James</i>	Date <i>9-JAN-2002</i>
Residence Barry, UK	
Citizenship British	
Post Office Address 24 Porthkerry Road, Barry, CF62 7AX, UK	

RECEIVED

2-10

Full name of second inventor, if any David Lawson	
Second inventor's signature 	Date 09/04/02
Residence Cardiff, UK CBX	
Citizenship British	
Post Office Address 3 St Margaret's Place, Whitchurch, Cardiff, CF17 7AD, UK	

30

Full name of third inventor, if any Melanie Van Der Veen	
Second inventor's signature <i>M Vander Veen</i>	Date <i>10/01/02</i>
Residence Cardiff, UK	
Citizenship British	
Post Office Address <i>CBX</i> 18 Gron Fford, Rhiwbina, Cardiff, CF14 6SJ, UK	